

## BRUSH SEALS


# LAS5035, LAS5040, LAS5045, LAS5050 & LAS5055

## HEAVY DUTY

Hard wearing, heavy duty brush seals, suitable for numerous installations and door types. Polypropylene brush seals with aluminium carriers. Flexible and durable. Quick and easy installation.



BRUSH SEALS

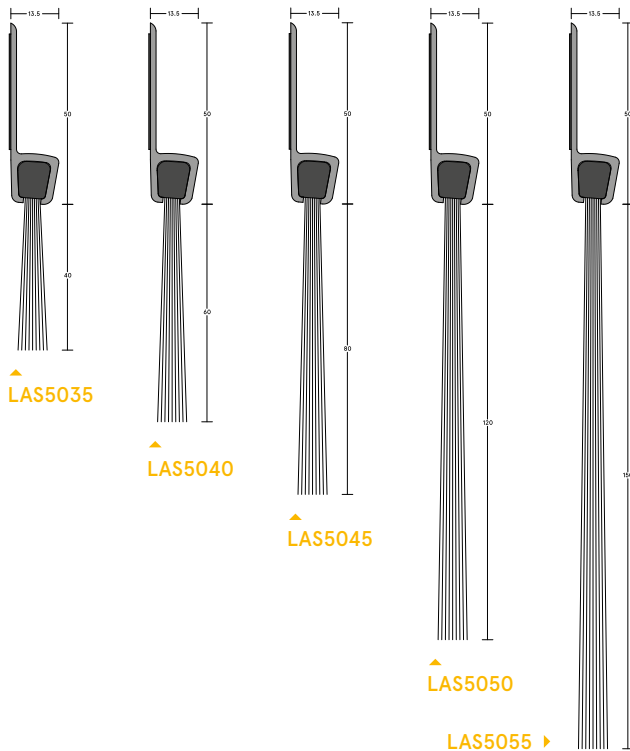

## SYSTEM SPECIFICATIONS

### Performance

- ▶ Meets smoke requirement: BS 9999: 2017.
- ▶ Protects against smoke, weather, draught and light.

### Location

- ▶ Head, jambs, threshold and meeting stiles of single and double swing doors, and sliding doors.
- ▶ Head, jambs and threshold of revolving doors, up and over doors, and roller shutter doors.

### Use with

- ▶ Any threshold plate.

### Min/max gap size

- ▶ LAS5035: 20mm/40mm.
- ▶ LAS5040: 40mm/60mm.
- ▶ LAS5045: 60mm/80mm.
- ▶ LAS5050: 80mm/120mm.
- ▶ LAS5055: 120mm/150mm.

### Seal material

- ▶ Polypropylene brush filaments, UV stabilised.

### Standard lengths

- ▶ 1m and 2.1m.
- Other lengths to special order.

### Fixing

- ▶ Heavy duty self-adhesive tape.
- ▶ Screw fixing recommended: screws not supplied.

### Finishes

- ▶ Silver anodised aluminium with black brush filaments as standard.
- ▶ Bronze anodised aluminium with black brush filaments are subject to non-standard charges and additional lead times.